

# *Pierre a Coller*

“The Light Solution”



by

**Granite Le Pelley**

The Pierre a Coller is a thin natural stone tile (12-15mm thickness) with split/dressed face that matches the look of a traditional random wall.

Granite Le Pelley, in partnership with a European factory, are very proud to be offering this technical solution for projects that require the weight and thickness to be reduced.

The look is further enhanced with a traditional pointing. Sealing coat is required when used outside.




## Advantages:

- Weight: less than 40kg/m<sup>2</sup> (conform to BS5385-2:2015)
- Technical - when there is not enough space (only 15/20mm total build up)
- Ideal for refurbishment projects or internal feature walls
- Less weight and manual handling
- Quicker installation - 3-5m<sup>2</sup> per man per day.

## Uses on:

- Externally (sealing recommended)
- Internally
- Traditional Cavity wall
- Timber Frame construction with cement board
- External Insulated render

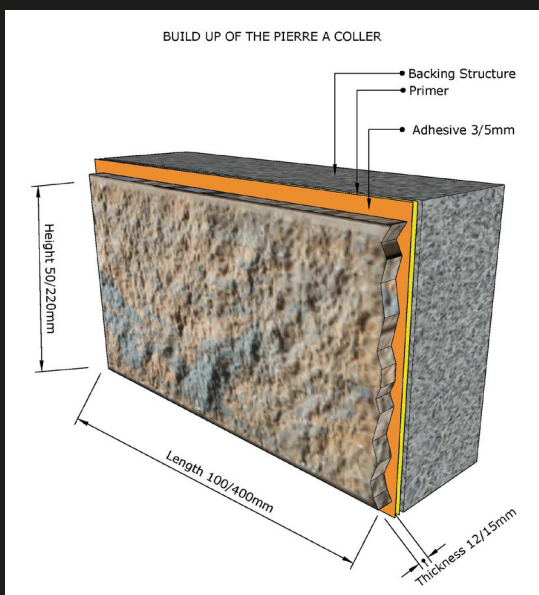

## Variety of the stone:

Granite, gneiss and sandstone

## Selection/Colour:



## Finish:

Natural split face, bush hammered and flamed

## Complementary Items:

L-shaped quoins and lintels are available to form the corner of the building and opening surround to give the look of solid construction.

## Cost (indicative)

- Supply only - £180 per m<sup>2</sup> + shipping - approx £8.00 per m<sup>2</sup> excluding storage (dependant on quantities)





## Installation

The thin stone tiles are adhesive fixed to clean backing structure (blockwork, render, wediboard, cement board etc). The backing wall needs to be with +/- 3mm tolerances which have a primer applied before the tiles are installed.

If the backing wall is out of tolerance it will need to be cement rendered.

The installation will require a little bit of Stonemason skill to adjust, redress and install in proportion.

A traditional lime or cement pointing is recommended as is a sealing process (external walls).



For more information, please contact:

Granite Le Pelley

Tel: 01534 832488

Email: [enquiries@granitelepellejje](mailto:enquiries@granitelepellejje)

[www.granitelepellejje](http://www.granitelepellejje)